

**QUICKLY**

**WAREWASHING  
SOLUTIONS  
BOOK**

**COLGED**  
useful innovation

**Dishwashers  
NEW SERIES 4**

Easy guide to washing solutions for  
**applications / needs / benefits**

**2025**

- **New product lines** ..... 4
- **Benefits for the users** ..... 13
- **Legend** ..... 15
- **Glasswasher** ..... 16  
*Bar - Wine bar - Wine shops - Establishments without a kitchen*
- **Dishwasher** ..... 20  
*Bistros - Restaurants up to 40 covers*
- **Hood-type machines** ..... 24  
*Hotel - Restaurants up to 80 / 100 covers*
- **Utensil washer** ..... 28  
*Bakeries - Pastry shops - Workshops - Gastronomy*
- **Rack conveyor diswasher** ..... 30  
*Restaurants from 100 covers upwards - Canteen - Cafeteria*
- **About us and Global Customer Support** ..... 34

## Innovation

---

### Customer-Driven Innovation – Technology That Responds to Real Needs.

We put customers at the center of innovation, using advanced technologies to meet evolving demands and deliver smart, future-ready solutions.



**SMART:** innovative solutions that make things simpler

**SUSTAINABILITY:** lower consumption, cost savings, and respect the planet

**VERSATILITY:** a solution for every requirement

**WORK STATION CARE:** comfort and safety

## Design

---

a new **DESIGN** that is both functional and unique, with distinctive details and premium **Made in Italy** materials.

## Performance

---

Reduce operating costs by **35%**

Energy savings of up to **26%**

Water savings of up to **31%**

Productivity increased by up to **40%**

Top-level energy efficiency: reduction of heat loss by up to **70%**

# New product lines designed to meet all needs.

Discover our 6 new product lines: tailored solutions designed to meet every need. With Italian creativity and precision, COLGED 4.0 enhances machine value through smart optimizations, improved controls, and added features that truly matter. Whether for dealers or end users, our Made in Italy solutions combine performance, aesthetics, and sustainability—offering the right answer for every requirement.

## steel<sup>tech</sup>

SteelTech is the perfect **entry point** into the world of professional warewashing - delivering solid performance, robust construction, and absolute ease of use. Designed for everyday reliability and simple operation, SteelTech is built to handle the essential demands of busy kitchens with maximum practicality and minimal complexity.



## top<sup>tech</sup>

A trusted name in professional warewashing, TopTech now enters a **new chapter with a modern, functional redesign**. It blends proven reliability with smart features and high efficiency—ideal for professionals who value ease of use, energy savings, and consistent results.



## isy<sup>tech</sup>

The IsyTech range has been thoughtfully enhanced to combine **outstanding performance with intuitive operation**. With targeted design and technology choices, it offers a user-friendly interface that takes efficiency and convenience to the next level.



## top<sup>tech plus</sup>

TopTech Plus is **the evolution** of the proven TopTech range – with improved performance, comfort, and sustainability. It delivers a **reliable, efficient solution** that blends quality, functionality, and intuitive operation.



## pro<sup>tech</sup>

ProTech is the **new generation** of professional dishwashing—designed for top performance with an intuitive, user-focused interface. Engineered for modern kitchens, it delivers efficiency, reliability, and smart operation in every detail.




## ultra<sup>tech</sup>

UltraTech sets **new standards in the premium segment**. As the top line in the COLGED portfolio, it offers maximum efficiency, intelligent design, and advanced technology—ideal for professionals seeking top performance, ease of use, and lasting durability.



\* available also with integrated osmosis **watermaster** -2- available also with double rack function **bistropro** -3- available also with steam heat recovery system **NrgSteam** -4- available also with automatic hood lift **prolift**

\* available also with integrated osmosis **watermaster** -2- available also with double rack function **bistropro** -3- available also with steam heat recovery system **NrgSteam** -4- available also with automatic hood lift **prolift**

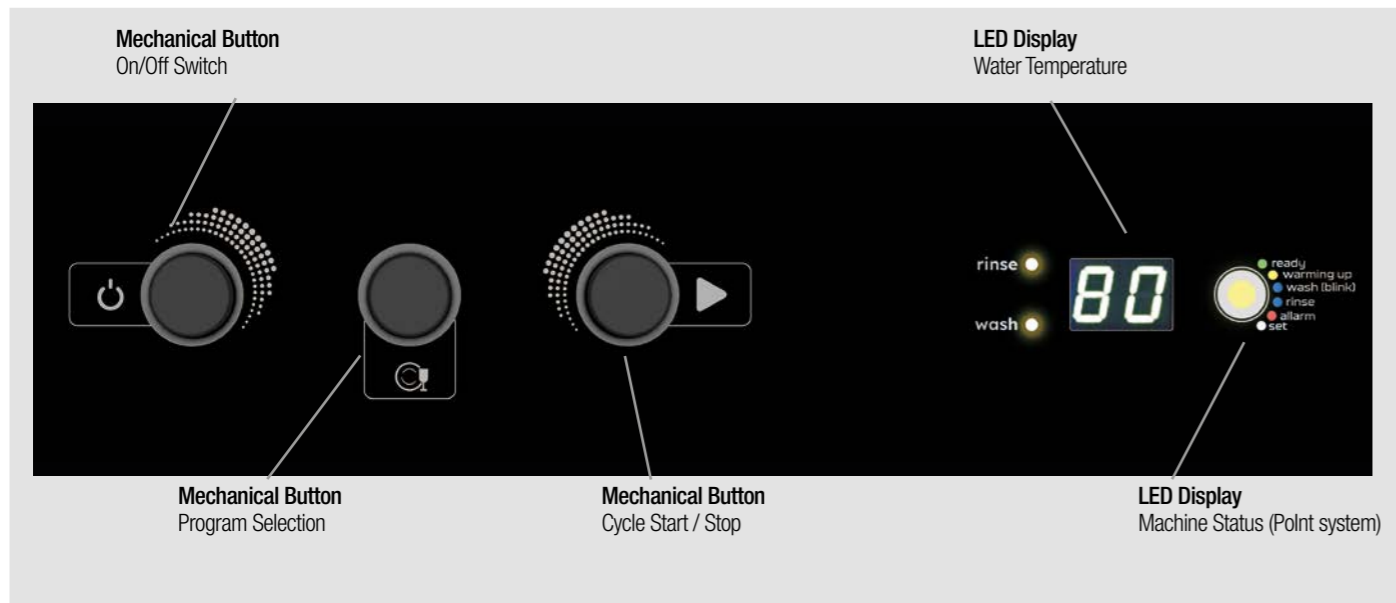

## New Mec4 Interface

SIMPLE – RELIABLE – SOLID

**6 selectable programs:**  
High flexibility

**LED display:**  
Temperature readout; newly designed LED blocks – larger and with white segments



**3 mechanical buttons:**  
Robust and reliable

**LED RGB**  
for **Point** functionality

**Optional external Wi-Fi:**  
Remote dishwasher management, remote service support, statistical analysis

**Extremely easy to use,**  
high readability, and complete information display

## Integrated Technologies

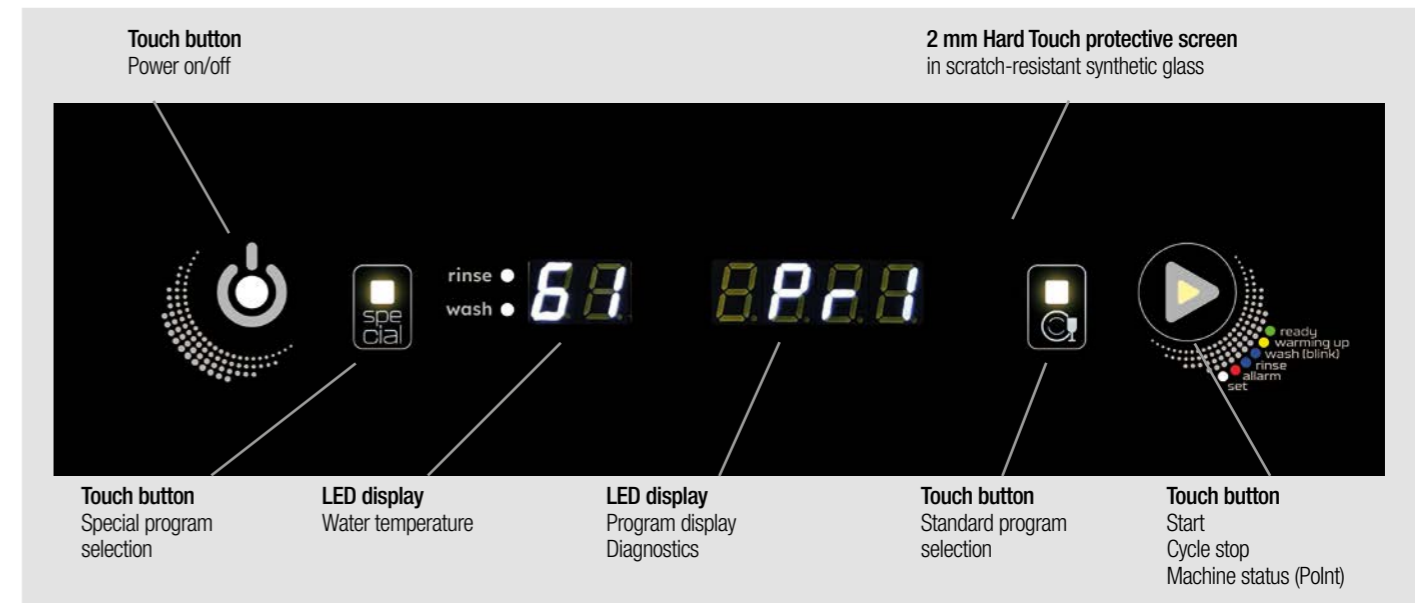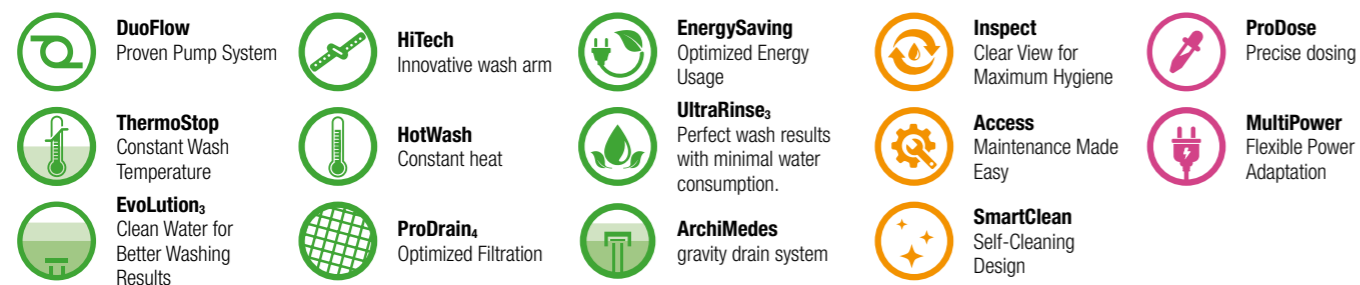

## New protouch Interface

IMMEDIATE – SAFE – FLEXIBLE

**10 selectable programs**  
High flexibility

**2 LED displays**  
temperature and interaction; newly designed LED blocks, larger with white segments

**4 capacitive buttons**  
including one RGB button for the **Point** functionality

**selection button**  
Standard program


**selection button**  
Special program


**Optional external Wi-Fi**  
remote dishwasher management, remote assistance, statistical analysis

**scratch-resistant**  
2 mm thick synthetic glass front panel

**Extremely easy to use**  
high readability, complete information display

## Integrated Technologies

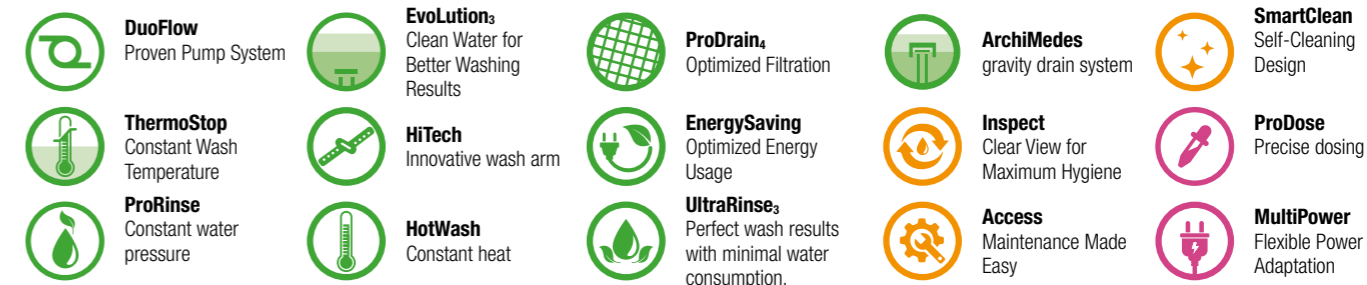

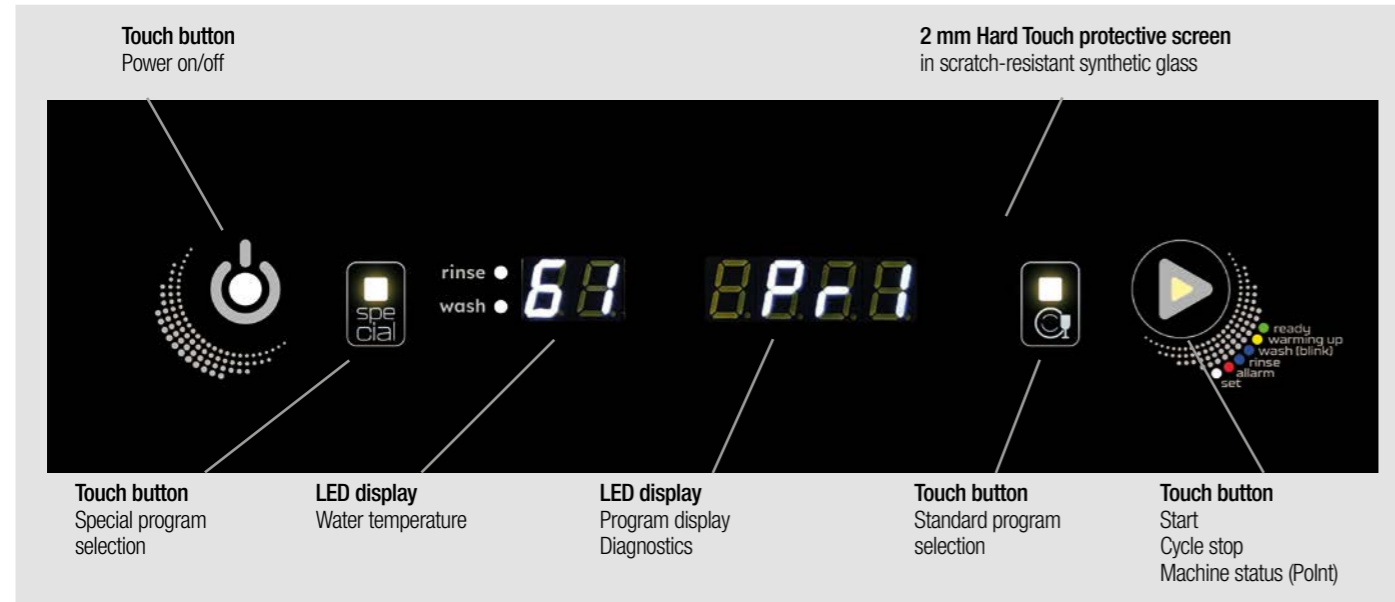

## New protouch Interface IMMEDIATE – SAFE – FLEXIBLE

**15 selectable programs**  
High flexibility

**2 LED displays**  
temperature and interaction; newly designed LED blocks, larger with white segments

**4 capacitive buttons**  
including one RGB button for the **Point** functionality

**selection button**  
Standard program

**selection button**  
Special program

**Optional external Wi-Fi**  
remote dishwasher management, remote assistance, statistical analysis

**scratch-resistant**  
2 mm thick synthetic glass front panel



**Extremely easy to use**  
high readability, complete information display

## Thermal Insulation Insulated – Quiet

The full double-wall construction with an air gap reduces thermal dispersion by up to 70%. **protech** dishwashers are engineered with smart construction solutions that minimize heat loss, control the flow of heat through structural elements, and maintain consistent internal temperatures.

The result: significantly lower energy consumption and reduced electricity costs.

## Integrated Technologies

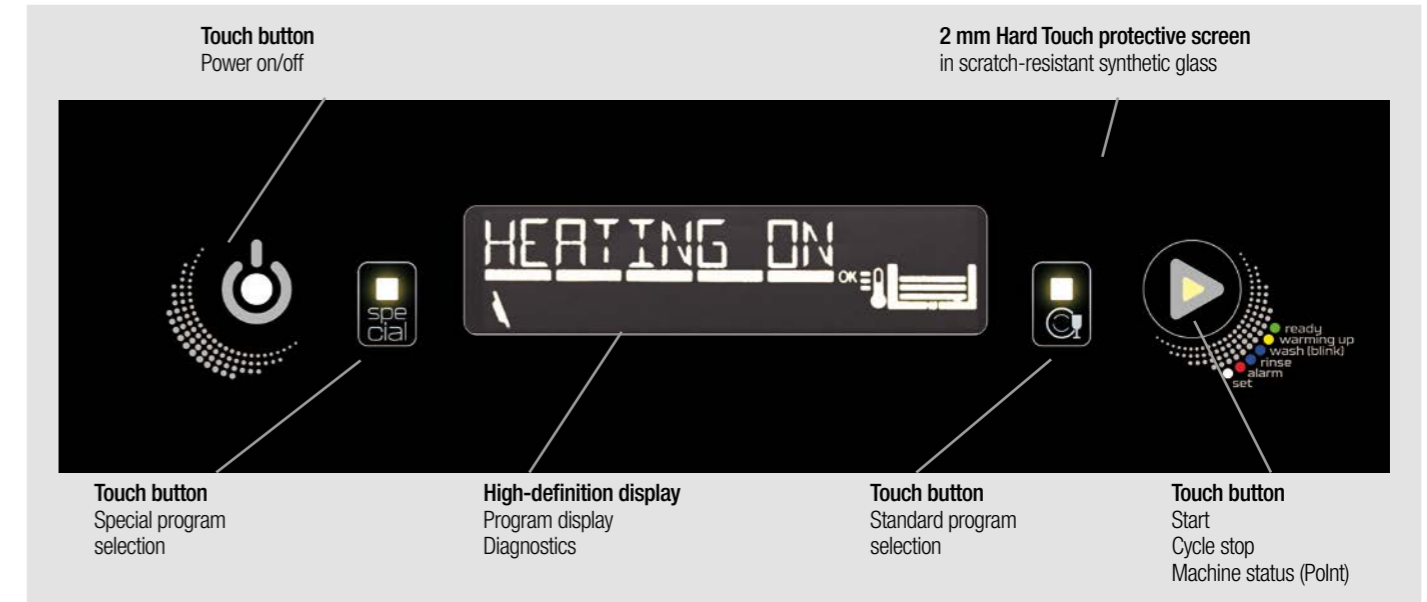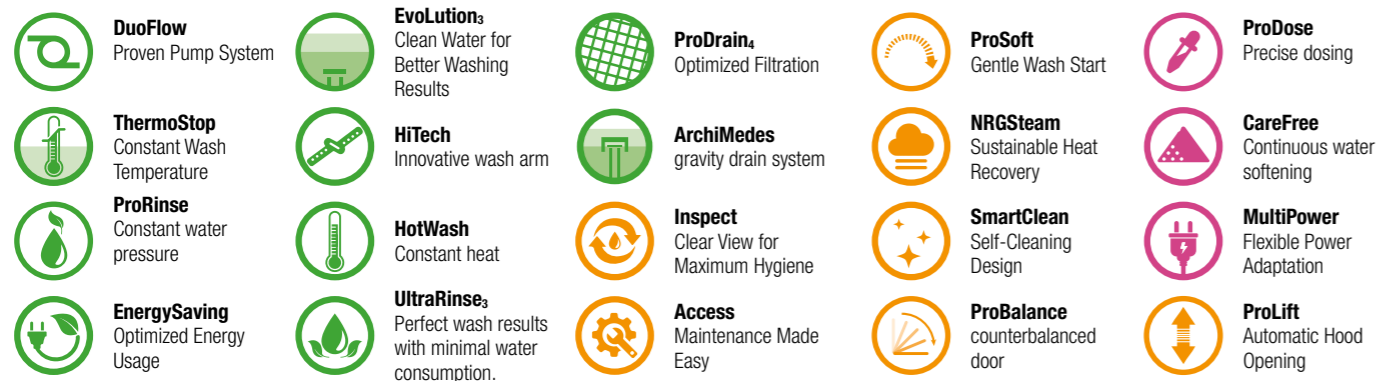

## New smartouch Interface RELIABLE – COMPLETE – VERSATILE

**15 selectable programs**  
maximum flexibility

**High-definition display:**  
Easy to read with white text on black background. Icons and scrolling text for intuitive navigation.

**Status indicators**  
with clear pictograms

**4 capacitive touch buttons**  
including one RGB button for **Point** functionality

**Standard program**  
selection button

**Special program**  
selection button

**Optional external Wi-Fi:**  
Remote dishwasher management, remote diagnostics and statistical analysis

**Scratch-resistant synthetic glass front panel,**  
2 mm thick


**Ease of use,**  
excellent readability, and complete information at a glance


## Thermal Insulation Insulated – Quiet

The full double-wall construction with an air gap reduces thermal dispersion by up to 70%. **toptech** dishwashers are engineered with smart construction solutions that minimize heat loss, control the flow of heat through structural elements, and maintain consistent internal temperatures.

The result: significantly lower energy consumption and reduced electricity costs.

## Integrated Technologies

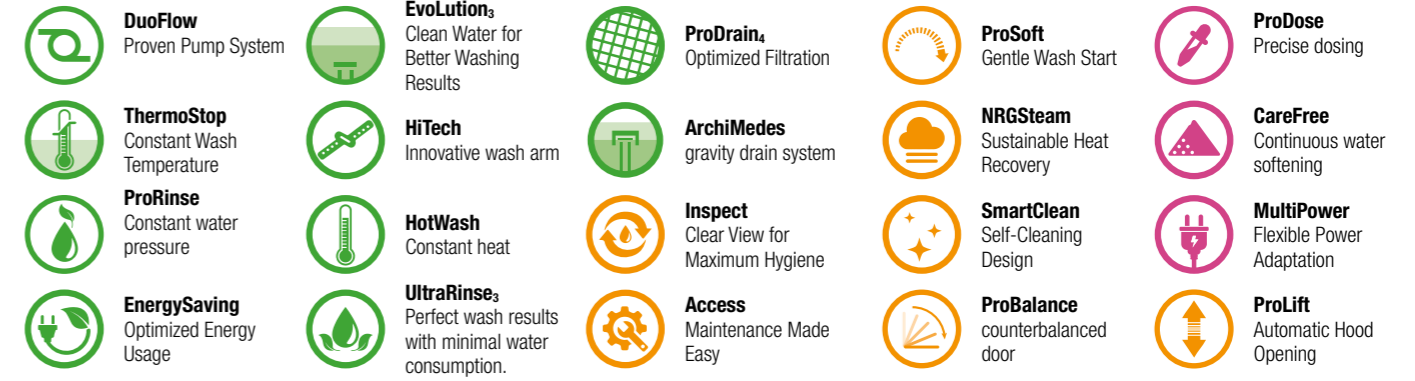

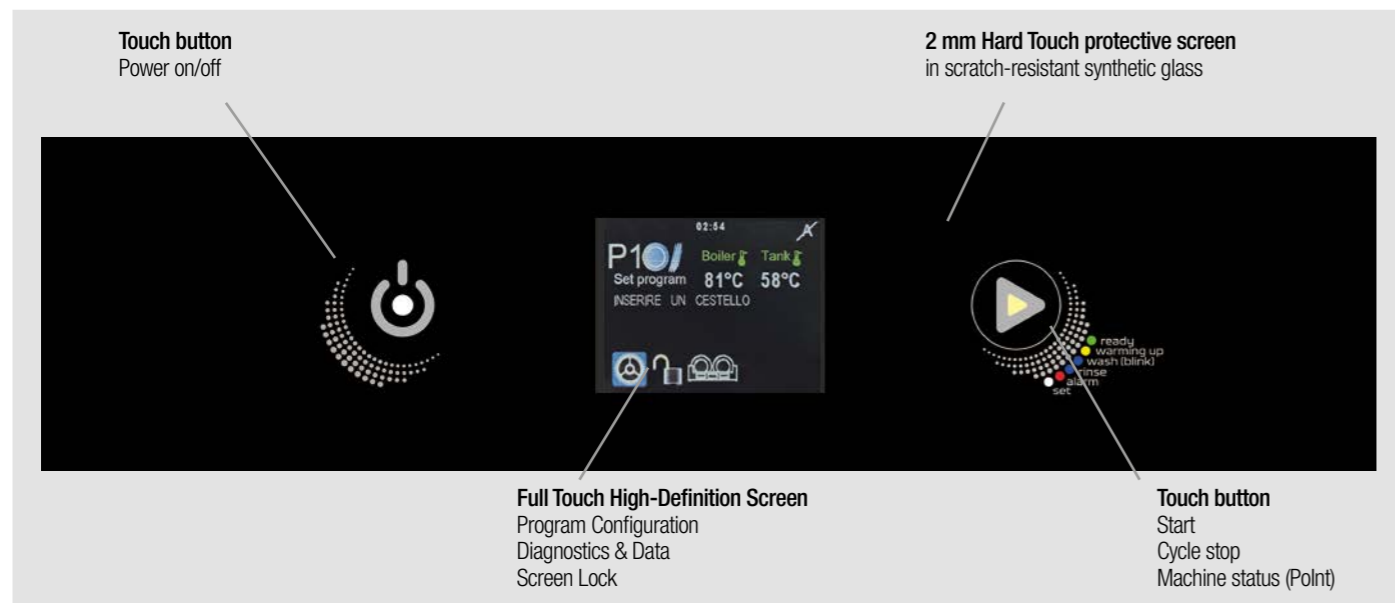

### New top<sup>touch</sup> Interface SMART – ALWAYS CONNECTED – ADVANCED

**23 selectable programs**  
maximum flexibility

**Configuration Concept**  
Simple, intuitive program management.

**Favorite Programs Screen**  
Up to 6 user-configurable programs

**Graphical Display**  
of Wash Cycle Progress

**Cycle Customization**  
Adjustable settings, even remotely.

**Screen Lock Function**  
Essential in compact spaces.


**Integrated Wi-Fi**  
Remote management, remote diagnostics, and performance analytics.

**TFT Full Touch Display**  
2.8" screen with 2 capacitive buttons, including one RGB-enable **Point** function button.

**Scratch-Resistant Synthetic Glass Front Panel**  
2 mm thick for durability and premium finish.

### Integrated Technologies

<b>DuoFlow</b> Proven Pump System	<b>EvoLution<sub>3</sub></b> Clean Water for Better Washing Results	<b>ProDrain<sub>3</sub></b> Optimized Filtration	<b>NRGSteam</b> Sustainable Heat Recovery	<b>ProDose</b> Precise dosing
<b>ThermoStop</b> Constant Wash Temperature	<b>HiTech</b> Innovative wash arm	<b>Inspect</b> Clear View for Maximum Hygiene	<b>SmartClean</b> Self-Cleaning Design	<b>CareFree</b> Continuous water softening
<b>ProRinse</b> Constant water pressure	<b>HotWash</b> Constant heat	<b>Access</b> Maintenance Made Easy	<b>ProBalance</b> counterbalanced door	<b>MultiPower</b> Flexible Power Adaptation
<b>EnergySaving</b> Optimized Energy Usage	<b>UltraRinse<sub>3</sub></b> Perfect wash results with minimal water consumption.	<b>ProSoft</b> Gentle Wash Start	<b>ProLift</b> Automatic Hood Opening	

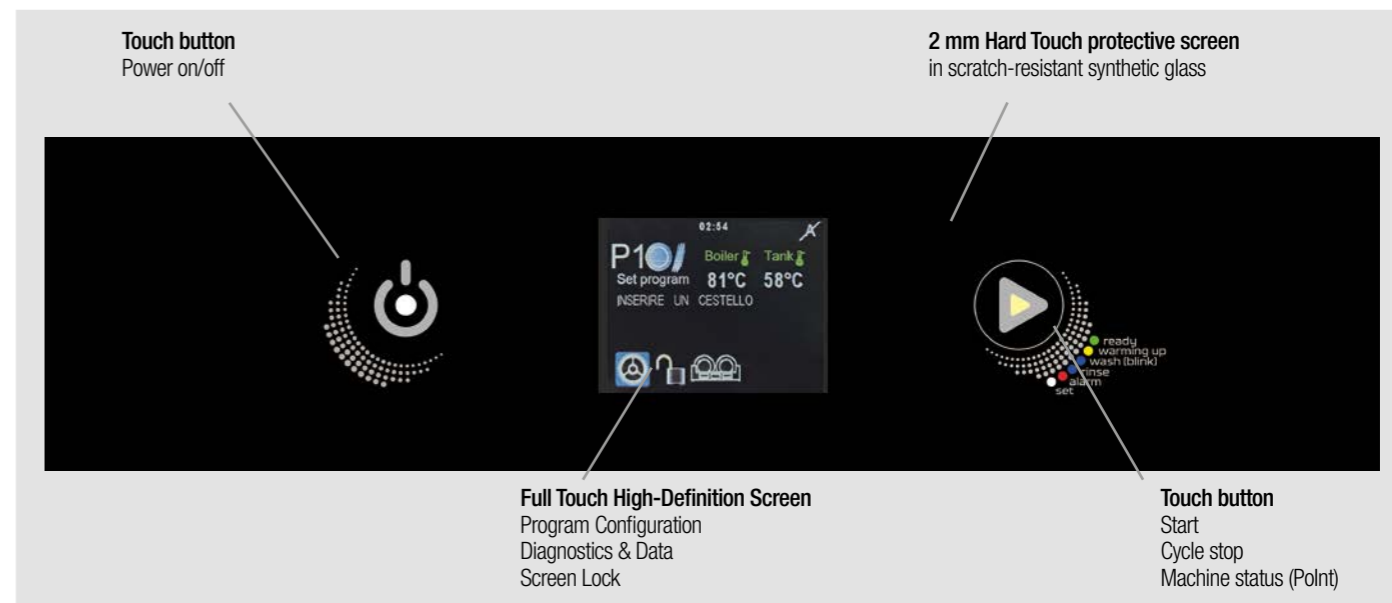

### New top<sup>touch</sup> Interface SMART – ALWAYS CONNECTED – ADVANCED

**30 selectable programs**  
maximum flexibility

**Configuration Concept**  
Simple, intuitive program management.

**Favorite Programs Screen**  
Up to 6 user-configurable programs

**Graphical Display**  
of Wash Cycle Progress

**Cycle Customization**  
Adjustable settings, even remotely.

**Screen Lock Function**  
Essential in compact spaces.

**Integrated Wi-Fi**  
Remote management, remote diagnostics, and performance analytics.

**TFT Full Touch Display**  
2.8" screen with 2 capacitive buttons, including one RGB-enable **Point** function button.

**Scratch-Resistant Synthetic Glass Front Panel**  
2 mm thick for durability and premium finish.

### Integrated Technologies

<b>DuoFlow</b> Proven Pump System	<b>EvoLution<sub>3</sub></b> Clean Water for Better Washing Results	<b>ProDrain<sub>3</sub></b> Optimized Filtration	<b>NRGSteam</b> Sustainable Heat Recovery	<b>ProDose</b> Precise dosing
<b>ThermoStop</b> Constant Wash Temperature	<b>HiTech</b> Innovative wash arm	<b>Inspect</b> Clear View for Maximum Hygiene	<b>SmartClean</b> Self-Cleaning Design	<b>CareFree</b> Continuous water softening
<b>ProRinse</b> Constant water pressure	<b>HotWash</b> Constant heat	<b>Access</b> Maintenance Made Easy	<b>ProBalance</b> counterbalanced door	<b>MultiPower</b> Flexible Power Adaptation
<b>EnergySaving</b> Optimized Energy Usage	<b>UltraRinse<sub>3</sub></b> Perfect wash results with minimal water consumption.	<b>ProSoft</b> Gentle Wash Start	<b>ProLift</b> Automatic Hood Opening	

### Exclusive technologies Low operating costs – Versatility – Ergonomics

#### Self-learning system (prometheus)

A self-learning system that monitors changes in the dishwasher from the moment of installation and continuously adapts to optimize performance. It includes an effective routine for automatic or manual testing of key components.

#### Heat recovery from drain water (ecodrain)

An innovative system that captures and reuses the heat from wastewater, preventing it from being wasted. This results in a significant reduction in energy consumption per cycle, in line with the EN63136:2019 standard.

#### Integral insulation (proTect)

Thanks to the use of sound- and heat-absorbing panels, the dishwasher is fully insulated in the wash chamber, boiler, and hood. This comprehensive insulation reduces both heat loss and standby power consumption in compliance with EN63136:2019.

# New series 4



# Benefits for the users



- Productivity and Flexibility (Solutions)**
  - Certified EN 63136 program duration reduced by **45%**
  - Larger wash chambers
  - Dedicated programs for all types of dishes
  - **BottleMasterPro** system for washing reusable water bottles
  - Programs optimized in compliance with EN 63136
  - New flat racks for up to 18 plates

- Certified Hygiene (Hygiene)**
  - Machines compliant with EN 17735:2022
  - Thermodisinfection programs (EN 15883), 71°C test (NSF 160°F), machine sanitation
  - Optimal wash and rinse water temperatures ensured by **Thermostop** on tank and boiler
  - "Green dot" hygiene status indicator

- Performance and Washing Results**
  - Automatic and continuous water softener
  - Reverse osmosis water treatment system
  - Basic, special, and utility programs
  - Fast drain and automatic water renewal function

- Easy and Intuitive (Easy to Use)**
  - Redesigned, intuitive, and voice-enabled user interfaces
  - Visual machine status control (**Point**)
  - Preconfigured program settings (**Configuration**)
  - **ProMetheus** predictive system
  - Controls positioned above the hood
  - Touchscreen lock function

- User Comfort and Safety (Work Station Care)**
  - Reduced steam and noise emissions
  - Counterbalanced door (**ProBalance**)
  - Light hood lifting (**ProGlide**)
  - Thermal and acoustic insulation
  - Automatic hood lifting system (**ProLift**)

- Reduced Consumption and Operating Costs (Savings)**
  - Lower water, energy, and detergent consumption
  - Adaptive rinse system (**Proportional4**)
  - Standby energy saving
  - Steam energy recovery system (**NRGSteam**)
  - DuoFlow wash system
  - Wastewater energy recovery system (**Ecodrain**)

- Easy Cleaning and Maintenance**
  - Triple filter system **ProDrain4**
  - Wash chambers with no dirt accumulation points
  - Surface tank filter
  - Dedicated self-cleaning and deep cleaning programs
  - Inspectable wash arms (**Inspect**)
  - Drain pump accessible directly from the tank (**Access**)

- Connected and in Control (Total Control)**
  - Integrated Wi-Fi and Bluetooth with TopTouch interface
  - Eurotec App for function control, telemetry, alarms, and consumption monitoring
  - Optional external gateway for other interfaces
  - Industry 4.0 ready
  - Prepared for Transition 5.0

**SMART:** innovative solutions that make things simpler  
**SUSTAINABILITY:** lower consumption, cost savings, and respect the planet  
**VERSATILITY:** a solution for every requirement  
**WORK STATION CARE:** comfort and safety

# QUICKLY

is the ultimate quick-reference guide to professional dishwashers: a smart, easy-to-use tool designed to support you in choosing the perfect solution with confidence.

Tailored to specific applications, it helps you rapidly identify customer needs and recommend the product that best meets them in terms of features, performance, price, and added value.

Its intuitive structure makes it easy to instantly compare the six product ranges, with clear summary tables organized by user type.

The tables - already divided by product category (glasswashers, dishwashers, hood-type machines, Utensil washers, and Rack-conveyors) - can be consulted from the left-hand page, where dimensions, basket sizes, and equipment are listed, or from the

right-hand page, highlighting key technologies and distinctive features. At the center, a clearly highlighted price column allows for fast, budget-driven decision-making.

A complete, practical, and indispensable tool you'll soon find impossible to work without.

## Legend

NAME	DEFINITION	BENEFIT
Automatic Water Exchange System	Partial drain system with triple filtration	Cleaner wash tank water and reduced energy and detergent consumption
Dosing Pumps	Peristaltic detergent and rinse-aid dosing pumps	Direct adjustment from the control panel
Pressurized Boiler	Water filling using mains water pressure	
Atmospheric Boiler with Rinse Pump	Water filling system independent of mains pressure	Constant and guaranteed pressure, flow rate, and temperature
Overflow Drain	Gravity drain system	Floor drain outlet
Drain Pump	Pump-assisted drain system	Wall drain outlet
Water Softener	Integrated water treatment system	Protects the machine from limescale and allows the use of less aggressive, more economical detergents
Integrated Reverse Osmosis	Integrated water treatment system	Parameter management directly from the interface. Eliminates manual polishing operations – outstanding results
Heat Recovery System	System that extracts and condenses steam	Recovers energy from steam to preheat incoming water and reduce vapour emissions
Drain Heat Recovery System	Thermal heat exchange system	Recovers energy from wastewater to preheat incoming water
Single-Wall Hood	Single-wall hood	
Double-Wall Hood	Spaced double-wall hood with 10 mm air gap	60% reduction in heat dispersion
Full Insulation	Complete insulation with sound- and heat-insulating panels	70% reduction in heat loss and reduced power consumption, even in standby mode
Single-Wall Side Panels	Single-wall side panels	
Partial Double-Wall Side Panels	Partial double-wall sides, with 40% of the panels double-walled	25% reduction in heat dispersion
Layered Double-Wall Side Panels	Layered double-wall sides with 3 mm air gap	35% reduction in heat dispersion
Double-Wall Side Panels	Spaced double-wall sides with 10 mm air gap	60% reduction in heat dispersion
Counterbalanced Door	Dampened closing system	Reduced operator effort
Deep-Drawn Tank	Fully deep-drawn wash tank	Wash chamber free from dirt accumulation points
Welded Tank	Welded and partially deep-drawn tank	Pressed base to facilitate the drainage of impurities
Self-Learning System	System that monitors operating changes	Optimizes performance and includes automatic test routines
Automatic Hood Lifting	Automatic hood lifting system	Reduces operator workload

# Glasswasher

Productivity: 48 racks per hour

## Bars - Wine bars - Wine Shops - Establishments without a kitchen

Ideal For:

\*Certified test according to IEC 63136:2019  
Performed using program PR2

Rack size cm	Dimensions cm	Model / Versions	Equipment	Setup / Configuration
35x35	Machine 40x49x60 cm Door opening 26 cm	steeltech 43-00	Peristaltic Rinse aid dispenser	
		steeltech 43-00 D	Peristaltic Rinse aid and detergent dispenser	
		steeltech 43-01 D	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
39x39	Machine 44x54x67 cm Door opening 32 cm	steeltech 44-00	Peristaltic Rinse aid dispenser	
		steeltech 44-00 D	Peristaltic Rinse aid and detergent dispenser	
		steeltech 44-01 D	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		isytech 44-10 D	Peristaltic Rinse aid and detergent dispenser	
		isytech 44-11 D	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		isytech 44-12 D	Peristaltic Rinse aid and detergent dispenser	
		isytech 44-13 D	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
40x40	Machine 47x56x70 cm Door opening 32 cm	protech 44-X11 D	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		protech 44-X12 D	Peristaltic Rinse aid and detergent dispenser	
		protech 44-X13 D*	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		protech 44-X13 TD	Peristaltic Rinse aid and detergent dispenser	Continuous water softener, partial drain with pump
		toptech 44-21 D	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		toptech 44-23 D	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		toptech 44-23 TD	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Continuous water softener, partial drain with pump
		toptechplus 44-33 D	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		toptechplus 44-33 TD	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Continuous water softener, partial drain with pump
40x40	Machine 47x56x82,5 cm Door opening 32 cm	protech 44-X13 WD	Peristaltic Rinse aid and detergent dispenser	Integrated reverse osmosis, partial drain with pump
		toptech 44-23 WD	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	
		toptechplus 44-33 WD	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	

Installed Power	Consumption per Cycle	Number of Programs	User Interface	Construction	Water Inlet / Type of Boiler	Water Outlet / Drain
16A - 3,2kW / Single-phase	1,5 L 0,29 KWh	3	Mec4 electromechanical	Welded tank with partially layered double-wall side panels	Pressurized boiler	Overflow
		3				Overflow
		5				Drain pump
16A - 3,2kW / Single-phase	1,5 L 0,29 KWh	4	Mec4 electromechanical	Welded tank with partially layered double-wall side panels	Pressurized boiler	Overflow
		4				Overflow
		6				Drain pump
		5	Protouch with 2 LED displays and 4 capacitive buttons	Welded tank with partially layered double-wall side panels	Atmospheric boiler with rinse pump	Overflow
		8				Drain pump
		5				Overflow
		8				Drain pump
		8				Drain pump
16A - 3,2kW / Single-phase	1,5 L 0,29 KWh	8	Protouch with 2 LED displays and 4 capacitive buttons	Deep-drawn wash tank with full double-wall construction and counterbalanced door	Pressurized boiler	Drain pump
		5			Overflow	
	1,5 L 0,21 KWh	8	Smartouch with High-definition display and 4 capacitive buttons		Atmospheric boiler with rinse pump	Drain pump
		8			Pressurized boiler	
		8			Atmospheric boiler with rinse pump	
		8				
		8				
		8				
		8				
16A - 3,2kW / Single-phase	1,5 L 0,29 KWh	6	Protouch	Deep-drawn wash tank with full double-wall construction and counterbalanced door	Atmospheric boiler with rinse pump	Drain pump
		6	Smartouch			
		6	Toptouch			

# Glasswasher

Productivity: 48 racks per hour

Ideal For:

## Bars - Wine bars - Wine Shops - Establishments without a kitchen

Rack size cm	Dimensions cm	Model / Versions	Equipment	Setup / Configuration
45x45	Machine 53x56x71 cm Door opening 30 cm	steeltech 45-00	Peristaltic Rinse aid dispenser	
		steeltech 45-00 D	Peristaltic Rinse aid and detergent dispenser	
		isytech 45-13 D	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
50x50	Machine 60x61x72 cm Door opening 30 cm	protech 45-X11 D	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		protech 45-X13 D	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		protech 45-X13 TD	Peristaltic Rinse aid and detergent dispenser	Continuous water softener, partial drain with pump
		toptech 45-21 D	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		toptech 45-23 D	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		toptech 45-23 TD	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Continuous water softener, partial drain with pump
		toptechplus 45-33 D	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		toptechplus 45-33 TD	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Continuous water softener, partial drain with pump
50x50	Machine 60x61x82 cm Door opening 30 cm	protech 45-X13 WD	Peristaltic Rinse aid and detergent dispenser	Integrated reverse osmosis, partial drain with pump
		toptech 45-23 WD	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	
		toptechplus 45-33 WD	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	

Installed Power	Consumption per Cycle	Number of Programs	User Interface	Construction	Water Inlet / Type of Boiler	Water Outlet / Drain
16A - 3,2kW / Single-phase	1,8 L 0,34 KWh	4	Mec4 electromechanical	Welded tank with single-wall side panels	Pressurized boiler	Overflow
		4	Mec4 electromechanical			Overflow
		8	Protouch with 2 LED displays and 4 capacitive buttons		Atmospheric boiler with rinse pump	Drain pump
16A - 7,5kW / Three-phase	2,0 L 0,31 KWh	12	Protouch with 2 LED displays and 4 capacitive buttons	Deep-drawn wash tank with full double-wall construction and counterbalanced door	Pressurized boiler	Drain pump
	1,5 L 0,29 KWh	12			Atmospheric boiler with rinse pump	
		12			Pressurized boiler	
	2,0 L 0,31 KWh	12	Smartouch with High-definition display and 4 capacitive buttons		Atmospheric boiler with rinse pump	
		12			Atmospheric boiler with rinse pump	
	1,5 L 0,29 KWh	14	Toptouch Full Touch High-Definition Screen with integrated Wi-Fi and 2 capacitive buttons		Atmospheric boiler with rinse pump	
		14			Atmospheric boiler with rinse pump	
	16A - 7,5kW / Three-phase	1,5 L 0,29 KWh	6		Protouch	
6			Smartouch			
7			Toptouch			

## Special Features



### Glasswasher Machines with Integrated Reverse Osmosis System (watermaster)

The new glasswasher machines with integrated reverse osmosis system offer easy control of operating parameters directly via the device's user interface. This greatly simplifies operation, and both systems can be managed centrally and conveniently. In addition, the integrated pre-filter cartridge leads to significant space savings.

# Dishwasher

Productivity: 48 racks per hour

Ideal For:  
**Bistros - Restaurants up to 40 covers**

\*Certified test according to IEC 63136:2019  
Performed using program PR2

Rack size cm	Dimensions cm	Model / Versions	Equipment	Setup / Configuration
50x50	Machine 57,5x60,5x82 cm Door opening 36,5 cm	steeltech 46-00 M	Peristaltic Rinse aid dispenser	
		steeltech 46-00 MD	Peristaltic Rinse aid and detergent dispenser	
		steeltech 46-01 MD	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		isytech 46-11 MD	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
50x50	Machine 57,5x60,5x82 cm Door opening 36,5 cm	steeltech 46-00	Peristaltic Rinse aid dispenser	
		steeltech 46-00 D	Peristaltic Rinse aid and detergent dispenser	
		steeltech 46-01 D*	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		isytech 46-10 D	Peristaltic Rinse aid and detergent dispenser	
		isytech 46-11 D*	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		isytech 46-12 D	Peristaltic Rinse aid and detergent dispenser	
		isytech 46-13 D	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
50x50	Machine 60x61x82 cm Door opening 40 cm	protech 46-X11 D	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		protech 46-X13 DCOP	Power consumption control, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		protech 46-X13 D	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		protech 46-X13 TD*	Peristaltic Rinse aid and detergent dispenser	Continuous water softener, partial drain with pump
		protech 46-X13 BD	Double rack function, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		toptech 46-21 D	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		toptech 46-23 D	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		toptech 46-23 TD	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Continuous water softener, partial drain with pump
		toptech 46-23 BD	Double rack function, full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		toptech 46-23 DCOP	Power consumption control, full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump

Installed Power	Consumption per Cycle	Number of Programs	User Interface	Construction	Water Inlet / Type of Boiler	Water Outlet / Drain		
16A - 3,2kW / Single-phase	2,0 L 0,31 KWh	4	Mec4 electromechanical	Welded tank with partially layered double-wall side panels	Pressurized boiler	Overflow		
		4				Overflow		
		6				Drain pump		
		8	Protouch with 2 LED displays and 4 capacitive buttons			Drain pump		
16A - 7,5kW / Three-phase	2,0 L 0,31 KWh	4	Mec4 electromechanical	Welded tank with partially layered double-wall side panels	Pressurized boiler	Overflow		
		4				Overflow		
	6	Drain pump						
	2,0 L 0,31 KWh	6	Protouch with 2 LED displays and 4 capacitive buttons			Overflow		
						2,0 L 0,26 KWh	8	Drain pump
								1,5 L 0,29 KWh
	10	Atmospheric boiler with rinse pump	Drain pump					
16A - 7,5kW / Three-phase	2,0 L 0,31 KWh	13	Protouch with 2 LED displays and 4 capacitive buttons	Deep-drawn wash tank with full double-wall construction and counterbalanced door	Pressurized boiler	Drain pump		
							1,5 L 0,29 KWh	15
	2,0 L 0,31 KWh	15	Pressurized boiler					
			1,5 L 0,29 KWh		15		Smartouch with High-definition display and 4 capacitive buttons	Atmospheric boiler with rinse pump

## Dishwasher

Productivity: 48 racks per hour

Ideal For:  
**Bistros - Restaurants up to 40 covers**

\*Certified test according to IEC 63136:2019  
Performed using program PR2

Rack size cm	Dimensions cm	Model / Versions	Equipment	Setup / Configuration
50x50	Machine 60x61x82 cm Door opening 40 cm	<b>toptechplus 46-33 D</b>	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		<b>toptechplus 46-33 TD</b>	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Continuous water softener, partial drain with pump
		<b>toptechplus 46-33 BD</b>	Double rack function, full-surface stainless steel filter, peristaltic Rinse aid and detergent dispense	Partial drain with pump
50x50	Machine 60x61x85 cm Door opening 40 cm	<b>ultratech 46-43 D*</b>	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Heat recovery from drain water, partial drain with pump, Advanced self-learning system, fully insulated
		<b>ultratech 46-43 TD</b>	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Continuous water softener, heat recovery from drain water, partial drain with pump, advanced self-learning system, fully insulated
		<b>ultratech 46-43 BD</b>	Double rack function, full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Heat recovery from drain water, partial drain with pump, advanced self-learning system, fully insulated

## Dishwasher

Productivity: 48-60 racks per hour

Ideal For:  
**Bakeries - Pastry shops - Butchers - Gastronomy**

Rack size cm	Dimensions cm	Model / Versions	Equipment	Setup / Configuration
50x60	Machine 60x70x85 cm Door opening 40,5 cm	<b>protech 46L-X11 D</b>	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		<b>protech 46L-X13 D</b>	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		<b>toptech 46L-23 D</b>	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		<b>toptechplus 46L-33 D*</b>	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
50x60	Machine 60x70x122,5 cm Door opening 40 cm	<b>steetech 47L-00 D</b>	Peristaltic Rinse aid and detergent dispenser	
		<b>protech 47L-X11 D</b>	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		<b>protech 47L-X13 D</b>	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		<b>toptech 47L-23D</b>	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		<b>toptechplus 47L-33D</b>	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump

## Special Features



### Special Solution for Bottle Cleaning (bottlemasterpro)

The BottleMasterPro bottle washing system has been developed for hygienic and efficient cleaning. The patented basket for 8 bottles, with integrated wash and rinse jets, is mounted directly on the lower wash arm bracket, replacing the conventional wash arm.

The IsyTech, ProTech, TopTech, TopTech Plus and UltraTech ranges feature specially tuned bottle washing programs that optimize the cleaning process and ensure consistent, first-class hygiene.

Installed Power	Consumption per Cycle	Number of Programs	User Interface	Construction	Water Inlet / Type of Boiler	Water Outlet / Drain
16A - 7,5kW / Three-phase	1,5 L 0,29 kWh	23	Toptouch Full Touch High-Definition Screen with integrated Wi-Fi and 2 capacitive buttons	Deep-drawn wash tank with full double-wall construction and counterbalanced door	Atmospheric boiler with rinse pump	Drain pump
16A - 8,0kW / Three-phase	1,4 L 0,22 kWh	30	Toptouch Full Touch High-Definition Screen with integrated Wi-Fi and 2 capacitive button	Deep-drawn wash tank with full double-wall construction and counterbalanced door	Atmospheric boiler with rinse pump	Drain pump
	1,4 L 0,20 kWh					
	1,4 L 0,20 kWh					

Installed Power	Consumption per Cycle	Number of Programs	User Interface	Construction	Water Inlet / Type of Boiler	Water Outlet / Drain
16A - 9,7kW / Three-phase	2,3 L 0,39 kWh	13	Protouch with 2 LED displays and 4 capacitive buttons	Deep-drawn wash tank with full double-wall construction and counterbalanced door	Pressurized boiler	Drain pump
	1,8 L 0,34 kWh	15	Smartouch with High-definition display and 4 capacitive buttons		Atmospheric boiler with rinse pump	
	2,0 L 0,22 kWh	23	Toptouch Full Touch High-Definition Screen with integrated Wi-Fi and 2 capacitive buttons			
16A - 9,7kW / Three-phase	2,3 L 0,39 kWh	4	Mec4 electromechanical	Deep-drawn wash tank with full double-wall construction and counterbalanced door	Pressurized boiler	Overflow
		13	Protouch with 2 LED displays and 4 capacitive buttons			
	1,8 L 0,34 kWh	15	Smartouch with High-definition display and 4 capacitive buttons		Atmospheric boiler with rinse pump	Drain pump
		23	Toptouch Full Touch High-Definition Screen with integrated Wi-Fi and 2 capacitive buttons			



### Double Rack Function for Maximum Efficiency (bistropro)

BistroPro technology has been specifically designed to optimize and speed up the washing of cups and saucers during the morning shift. Two sliding wire racks on dedicated rails and a tailor-made wash program ensure efficient utilization.

For maximum flexibility, the upper rack can be easily removed, allowing the dishwasher to be used as usual in subsequent shifts. The perfect solution for a smooth and efficient bistro routine!

## Hood-type machines

Productivity: 48 racks per hour

Ideal For:  
**Hotel - Restaurants up to 80 / 100 covers**

\*Certified test according to IEC 63136:2019  
Performed using program PR2

Rack size cm	Dimensions cm	Model / Versions	Equipment	Setup / Configuration
50x50	Machine 63,3x75x159 cm Door opening 47 cm	steeltech 48-00 D	Peristaltic Rinse aid and detergent dispenser	
		steeltech 48-01 D	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		isytech 48-10 D	Peristaltic Rinse aid and detergent dispenser	
		isytech 48-11 D	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		isytech 48-12 D	Peristaltic Rinse aid and detergent dispenser	
		isytech 48-13 D*	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump

Installed Power	Consumption per Cycle	Number of Programs	User Interface	Construction	Water Inlet / Type of Boiler	Water Outlet / Drain
16A - 9,5kW / Three-phase	2,0 L 0,36 KWh	4	Mec4 electromechanical	Deep-drawn wash tank with single-wall hood	Pressurized boiler	Overflow
		6				Drain pump
	2,0 L 0,32 KWh	6	Protouch with 2 LED displays and 4 capacitive buttons			Overflow
		8			Drain pump	
	1,5 L 0,32 KWh	10			Overflow	
					Drain pump	
			Atmospheric boiler with rinse pump	Overflow		
				Drain pump		

## Hood-type machines

Productivity: 60 racks per hour

Rack size cm	Dimensions cm	Model / Versions	Equipment	Setup / Configuration
50x50	Machine 63,3x75x159 cm Door opening 47 cm	protech 48-X10 D	Peristaltic Rinse aid and detergent dispenser	
		protech 48-X11 D	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		protech 48-X12 D	Peristaltic Rinse aid and detergent dispenser	
		protech 48-X13 D*	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		protech 48-X13 DL	Peristaltic Rinse aid and detergent dispenser	Automatic hood opening, partial drain with pump
		protech 48-X13 TD	Peristaltic Rinse aid and detergent dispenser	Continuous water softener, partial drain with pump
		toptech 48-21 D	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		toptech 48-22 D	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	
		toptech 48-23 D	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		toptech 48-23 DL	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Automatic hood opening, partial drain with pump
		toptech 48-23 TD	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Continuous water softener, partial drain with pump
		toptechplus 48-33 D	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		toptechplus 48-33 DL	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Automatic hood opening, partial drain with pump
		toptechplus 48-33 TD	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Continuous water softener, partial drain with pump
		ultratech 48-43D*	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Heat recovery from drain water, partial drain with pump, Advanced self-learning system, fully insulated
		ultratech 48-43DL	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Heat recovery from drain water, automatic hood opening, partial drain with pump, advanced self-learning system, fully insulated

Installed Power	Consumption per Cycle	Number of Programs	User Interface	Construction	Water Inlet / Type of Boiler	Water Outlet / Drain
16A - 10,2kW / Three-phase	2,0 L 0,31 KWh	6	Protouch with 2 LED displays and 4 capacitive buttons	Deep-drawn wash tank with double-wall hood	Pressurized boiler	Overflow
		14			Pressurized boiler	Drain pump
	1,5 L 0,31 KWh	8			Atmospheric boiler with rinse pump	Overflow
		16			Drain pump	
	2,0 L 0,31 KWh	24	Smartouch with High-definition display and 4 capacitive buttons		Pressurized boiler	Overflow
					Atmospheric boiler with rinse pump	Drain pump
	1,5 L 0,31 KWh	30	Toptouch Full Touch High-Definition Screen with integrated Wi-Fi and 2 capacitive buttons		Atmospheric boiler with rinse pump	Drain pump

## Hood-type machines

Productivity: 60 racks per hour

Hotel - Restaurants up to 80 / 100 covers

Ideal For:

\*Certified test according to IEC 63136:2019  
Performed using program PR2

Rack size cm	Dimensions cm	Model / Versions	Equipment	Setup / Configuration
50x60	Machine 70x75x159 cm Door opening 47 cm	protech 49-X11 D	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		protech 49-X13 D	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		toptech 49-22 D	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	
		toptech 49-23 D*	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		toptechplus 49-33 D	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		ultratech 49-43 D	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Heat recovery from drain water, partial drain with pump, Advanced self-learning system, fully insulated

## Hood-type machines with steam heat recovery system

Productivity: 60 racks per hour

Rack size cm	Dimensions cm	Model / Versions	Equipment	Setup / Configuration
50x50	Machine 63,3x75x228,3 cm Door opening 47 cm	protech 48-X13 D NRG	Peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		toptech 48-23 D NRG*	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		toptech 48-23 TD NRG	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Continuous water softener, partial drain with pump
		toptechplus 48-33 D NRG	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		ultratech 48-43 D NRG	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Heat recovery from drain water, partial drain with pump, Advanced self-learning system, fully insulated
50x60	Machine 70x75x228,3 cm Door opening 47 cm	toptech 49-23 D NRG	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		toptechplus 49-33 D NRG	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		ultratech 49-43 D NRG	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Heat recovery from drain water, partial drain with pump, Advanced self-learning system, fully insulated

## Special Features



### Special Solution for Bottle Cleaning (bottlemasterpro)

The BottleMasterPro bottle washing system has been developed for hygienic and efficient cleaning. The patented basket for 8 bottles, with integrated wash and rinse jets, is mounted directly on the lower wash arm bracket, replacing the conventional wash arm.

The IsyTech, ProTech, TopTech, TopTech Plus and UltraTech ranges feature specially tuned bottle washing programs that optimize the cleaning process and ensure consistent, first-class hygiene.



### Double-hood system for high productivity (doublepro)

The ideal solution for busy kitchens with intense work shifts where a rack conveyor dishwasher cannot be installed due to space limitations. By simply connecting the two hoods with a linking table, hourly productivity is doubled. The connection table is available in three different lengths to suit a variety of layout and workflow needs.

Installed Power	Consumption per Cycle	Number of Programs	User Interface	Construction	Water Inlet / Type of Boiler	Water Outlet / Drain
16A - 10kW / Three-phase	2,3 L 0,39 KWh	14	Protouch with 2 LED displays and 4 capacitive buttons	Deep-drawn wash tank with double-wall hood	Pressurized boiler	Drain pump
	1,8 L 0,34 KWh	16				
	1,8 L 0,28 KWh	8	Smartouch with High-definition display and 4 capacitive buttons		Overflow	
	1,8 L 0,28 KWh	16			Atmospheric boiler with rinse pump	Drain pump
	1,8 L 0,34 KWh	21				
1,8 L 0,34 KWh	26	Toptouch Full Touch High-Definition Screen with integrated Wi-Fi and 2 capacitive buttons				

Installed Power	Consumption per Cycle	Number of Programs	User Interface	Construction	Water Inlet / Type of Boiler	Water Outlet / Drain
16A - 10,2kW / Three-phase	1,5 L 0,31 KWh	16	Protouch	Deep-drawn wash tank with double-wall hood	Atmospheric boiler with rinse pump	Drain pump
	1,5 L 0,29 KWh		Smartouch			
	1,5 L 0,31 KWh	24	Toptouch			
	1,4 L 0,29 KWh	30				
16A - 10kW / Three-phase	1,8 L 0,34 KWh	16	Smartouch	Deep-drawn wash tank with double-wall hood	Atmospheric boiler with rinse pump	Drain pump
		21	Toptouch			
		26				



### Heat Recovery (NRGsteam)

NRGsteam is the latest innovation in the NRG project, intelligently condensing steam after the wash cycle. This prevents steam from escaping when the hood is opened, improving workplace comfort and reducing humidity. The recovered heat is used to preheat incoming water, cutting energy use and removing the need for an exhaust hood. More efficiency, less energy – ideal for modern kitchens.



### Automatic Hood Opening (ProLift)

ProLift technology combines intelligent engineering with maximum user convenience. The lift and close function can be easily activated via push button for fast, ergonomic operation. For even more flexibility, the control can also be triggered by a mechanical button placed up to 2 meters away. A practical, well-thought-out, and stylish solution that makes workflows more efficient and comfortable.

# Utensil washer

Productivity: 30 racks per hour

Ideal For: **Bakeries - Pastry shops - Butchers - Gastronomy**

Rack size cm	Dimensions cm	Model / Versions	Equipment	Setup / Configuration
50x60	Machine 60x70x85 cm Door opening 40,5 cm	IsyTech 32 - 10 D.1	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		IsyTech 32 - 11 D.1	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	
		TopTech 32 - 23 D.1	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	
50x60	Machine 60x70x129 cm Door opening 40,5 cm	IsyTech 32 - 10 D.2	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		IsyTech 32 - 11 D.2	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	
		TopTech 32 - 23 D.2	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	
56X63	Machine 72x78x173 cm (h. incl. NRG 196) Door opening 65 cm	IsyTech 32 - 10 D.4	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		IsyTech 32 - 11 D.4	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	
		TopTech 32 - 23 D.4	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	
		TopTech 32 - 23 D.4 NRG	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Steam heat recovery system, partial drain with pump
56X63	Machine 72x78x193 cm (h. incl. NRG 215) Door opening 85 cm	IsyTech 32 - 10 D.5	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		IsyTech 32 - 11 D.5	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	
		TopTech 32 - 23 D.5	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	
		TopTech 32 - 23 D.5 NRG	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Steam heat recovery system, partial drain with pump
70X70	Machine 85x85x196 cm (h. incl. NRG 219) Door opening 85 cm	TopTech 32 - 23 D.6	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		TopTech 32 - 23 D.6 NRG	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Steam heat recovery system, partial drain with pump
131X70	Machine 147x85x196 cm (h. incl. NRG 219) Door opening 85 cm	TopTech 32 - 23 D.7	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Partial drain with pump
		TopTech 32 - 23 D.7 NRG	Full-surface stainless steel filter, peristaltic Rinse aid and detergent dispenser	Steam heat recovery system, partial drain with pump

## Special Features



### Heat Recovery (NRGsteam)

NRGsteam is the latest innovation in the NRG project, intelligently condensing steam after the wash cycle. This prevents steam from escaping when the hood is opened, improving workplace comfort and reducing humidity. The recovered heat is used to preheat incoming water, cutting energy use and removing the need for an exhaust hood. More efficiency, less energy – ideal for modern kitchens.

Installed Power	Consumption per Cycle	Number of Programs	User Interface	Construction	Water Inlet / Type of Boiler	Water Outlet / Drain
16A - 9,8kW / Three-phase	2,4 L	8	Proscreen with LED display and 4 buttons	Deep-drawn wash tank with full double-wall construction	Pressurized boiler	Overflow
		12	Smartscreen with High-definition display and 4 buttons		Atmospheric boiler with rinse pump	Drain pump
16A - 9,8kW / Three-phase	2,4 L	8	Proscreen with LED display and 4 buttons	Deep-drawn wash tank with full double-wall construction	Pressurized boiler	Overflow
		12	Smartscreen with High-definition display and 4 buttons		Atmospheric boiler with rinse pump	Drain pump
20A - 10,5kW / Three-phase	3 L	9	Proscreen with LED display and 4 buttons	Deep-drawn wash tank with full double-wall construction	Pressurized boiler	Overflow
			Smartscreen with High-definition display and 4 buttons		Atmospheric boiler with rinse pump	Drain pump
20A - 10,5kW / Three-phase	3 L	9	Proscreen with LED display and 4 buttons	Deep-drawn wash tank with full double-wall construction	Pressurized boiler	Overflow
			Smartscreen with High-definition display and 4 buttons		Atmospheric boiler with rinse pump	Drain pump
32A - 18,7kW / Three-phase	4 L	9	Smartscreen with High-definition display and 4 buttons	Deep-drawn wash tank with full double-wall construction	Atmospheric boiler with rinse pump	Drain pump
32A - 15,9kW / Three-phase	6 L	9	Smartscreen with High-definition display and 4 buttons	Deep-drawn wash tank with full double-wall construction	Atmospheric boiler with rinse pump	Drain pump

eurotec app - eurotec cloud  
Industry 4.0 (for all ranges)

## Rack conveyor dishwasher

Productivity: 120-270 racks per hour


Ideal For:  
Restaurants from 100 covers upwards  
- Canteen - Cafeteria

Model / Versions	Code	Racks / h	Setup / Configuration
IsyTech 31 - 10.1	T101CD	120	Wash - Rinse
IsyTech 31 - 10.2	T102CD	210	Prewash - Wash - Rinse
IsyTech 31 - 11.1	T111CDT	160	Wash - Rinse (ProRinse)
IsyTech 31 - 11.2	T112CDT	270	Prewash - Wash - Rinse (ProRinse)


For information purpose only. For a final quotation, please contact our Presales Department: [prevendita@itweurotec.it](mailto:prevendita@itweurotec.it)



## Installation diagram

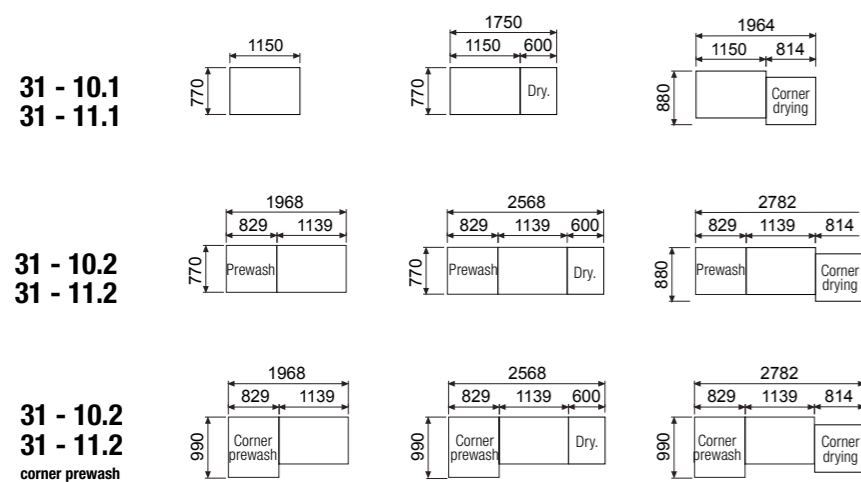

## Large aperture

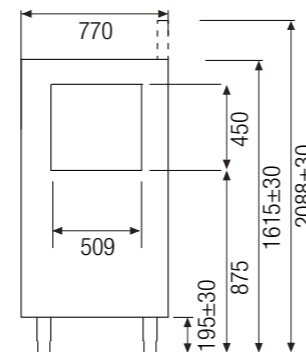

## Rack conveyor dishwasher

Productivity: 200-320 racks per hour


Ideal For:  
Restaurants from 100 covers upwards  
- Canteen - Cafeteria

Model / Versions	Code	Racks / h	Setup / Configuration
ProTech 31 - 20.1	T211CDT	200	Wash - Multiple Rinse (DuoRinse)
ProTech 31 - 21.1	T221CDT	200	Wash - Multiple Rinse (UltraRinse)
ProTech 31 - 20.2	T212CDT	270	Prewash - Wash - Multiple Rinse (DuoRinse)
ProTech 31 - 21.2	T222CDT	270	Prewash - Wash - Multiple Rinse (UltraRinse)
ProTech 31 - 20.3	T213CDT	320	Prewash - Wash 1 - Wash 2 - Multiple Rinse (DuoRinse)
ProTech 31 - 21.3	T223CDT	320	Prewash - Wash 1 - Wash 2 - Multiple Rinse (UltraRinse)


For information purpose only. For a final quotation, please contact our Presales Department: [prevendita@itweurotec.it](mailto:prevendita@itweurotec.it)



## Installation diagram

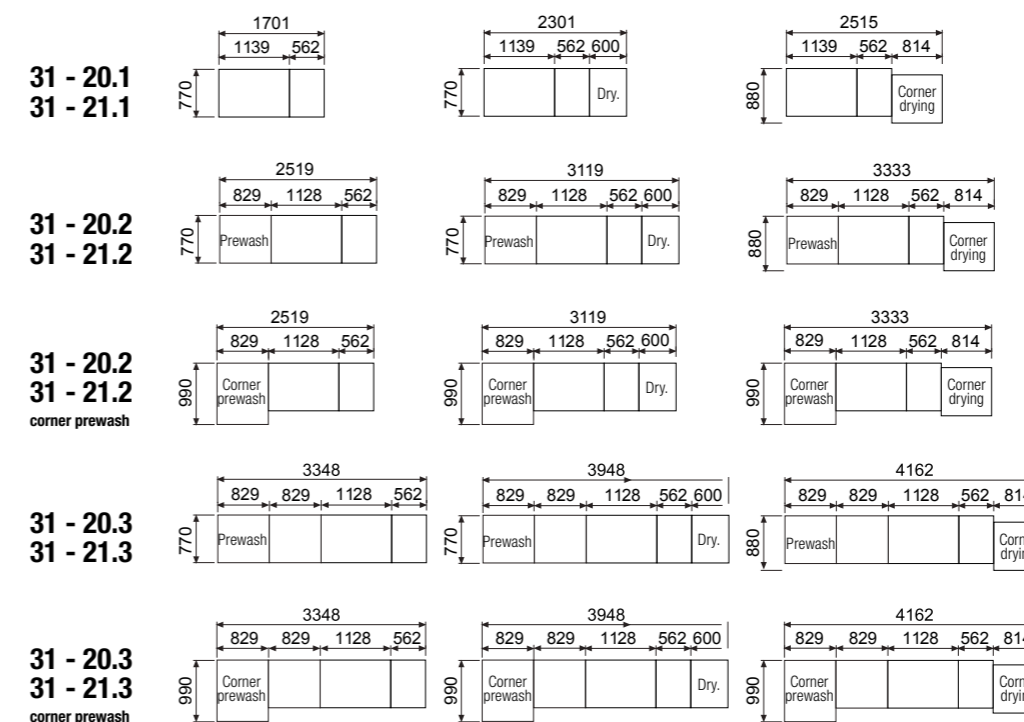

## Large aperture

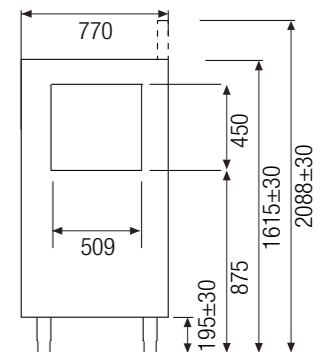



# About us!



## More than 60 years of excellence in professional warewashing – innovation and quality dedicated to Ho.Re.Ca. professionals.

Over 60 Years of Italian Excellence in Professional Warewashing.

Founded more than six decades ago in Italy, our company has grown into a globally recognized leader in the field of professional warewashing. From the very beginning, our commitment to quality, innovation, and attention to detail has shaped everything we do. Today, we are proud to bring Italian expertise and craftsmanship to over 80 countries around the world.

Rooted in a strong tradition of engineering and design, we have continuously evolved to meet the changing needs of the market. Our broad and ever-growing range of products reflects our dedication to delivering reliable, high-performance, and sustainable solutions for the Ho.Re.Ca. sector and beyond.

Our global presence is supported by a trusted network of partners and distributors, ensuring that our customers receive expert support and immediate service—no matter where they are. This international reach, combined with our deep Italian heritage, is what makes our brand unique.

Innovation is at the heart of our mission. With a highly skilled team and continuous investment in research and development, we create advanced technologies that improve workflows, increase efficiency, and raise hygiene standards—helping professionals focus on what they do best.

As we look to the future, we remain true to our values: Italian quality, forward-thinking design, and a passion for excellence. With the continued trust of our customers and the dedication of our people, we are excited to shape the next chapter of our journey—bringing more innovation, more sustainability, and more Italian ingenuity to the world.



# Global Customer Support

Global Customer Support is our signature approach - a relationship model through which every activity is carried out in close synergy with our partners.



From the earliest development stages to after-sales support, technical consulting, and ongoing training, we stand by our customers every step of the way—offering dedicated services and flexible tools designed to be close to people and their needs.

### After-Sales

A team of specialized technicians dedicated to supporting customers in the most complex after-sales activities—where speed, expertise, and responsiveness come together to deliver excellence.

### Pre-Sales

Qualified professionals providing expert support and guidance—identifying customer needs and recommending the most suitable solutions.

### Academy

Structured learning paths and tailored programs designed to provide comprehensive technical and commercial training—ensuring continuous development and up-to-date expertise.

### Taylor-Made Solutions

Custom solutions designed to meet the specific needs of the Ho.Re.Ca. world—delivering precision, performance, and flexibility where it matters most.

We also develop next-generation devices and applications, diagnostics, telemetry, and remote support solutions to be constantly at our customers' side.

# service

With Eurotec Service, we take care of the entire product life cycle and are able to ship over 6,000 product references within 24 hours to any country in the world, meeting the demands of increasingly demanding markets.



performance **4** savings  
series new

**ITW** FOOD EQUIPMENT GROUP

**EUROTEC s.r.l. - divisione COLGED**

Via Provinciale Romana, 6 - 55011 Badia Pozzeveri - Altopascio (LU)

Tel. +39 0583 2783 - Fax +39 0583 276506

[www.colged.it](http://www.colged.it) - [info\\_colged@itweurotec.it](mailto:info_colged@itweurotec.it)